

# Conservatory warm roof conversion system





### **IS YOUR EXISTING CONSERVATORY ROOF:**

- Too hot in summer or too cold in winter?
- Waste of valuable living space?
- Unable to relax to watch TV?

# Transform your conservatory into a comfortable, all year round living space...

# ...WITH THE GUARDIAN WARM ROOF CONVERSION SYSTEM:

- High performance insulated warm roof conversion system
- Lightweight aluminium frame
- Provides energy cost savings
- Reduces rain noise and glare


The Guardian Warm Roof System is the biggest revelation to hit the home improvement market in the last ten years. You can now change your old conservatory roof for a new Guardian Roof and effectively turn your old conservatory into a new extension that can be used all year round. The complete changeover takes only three days with very minimal disruption to your household.

The Roof System is designed to replace the existing glass or polycarb roof of a conservatory while retaining the original windows, doors, frames and walls. At the same time providing substantial energy cost savings.

Fully tested and approved to all thermal and structural standards, the Guardian system is a high performance insulated roof system comprising of a pre-engineered lightweight frame, two layers of rigid insulation board, internal insulated plasterboard, exterior grade plywood, vapour membrane and a choice of external tile finishes.



#### Guardian warm roof construction



For a free no obligation site survey and quotation: call FREE: o8oo o665832 or email: info@guardianroof.co.uk

With planning consent, **internal dividing doors or walls can be removed** to provide a permanent extension to your living room, kitchen, etc.

## THE AFFORDABLE GUARDIAN WARM ROOF CONVERSION SYSTEM



LABC Registered (minimise building control checks & approval process)



Reduced fuel bills for the life of the roof

Comfortable ambient temperature all year round



A wide range of roof colours and finishes available



Achieves a U-value of 0.18 (England & Wales) and 0.15 (Scotland)



Thermal, structural and condensation risk tested



Fast installation utilising existing walls, windows and doors via our **nationwide installer network** 



Fully guaranteed





## Roof design options

## Guardian roof provide standard warm roof solutions for existing conservatory roof design. Bespoke solutions also available.

#### Edwardian

The Classic Sunroom shape. Together with attractive roof windows the Edwardian Guardian Roof is the traditional safe bet for styling and convenience. The Edwardian shape also helps to maximise the room space below. The roof is very sympathetic to all house styles as its ridge is so versatile, it can also be the perfect solution to a Bungalow extension.











#### Lean-to

The Guardian Lean-To is ideal to maximise space at the back of the house. The ends can either have one or to hips (slopes). It is ideal for kitchen extensions and can go as low as 15 Degrees with roof windows.








#### Victorian

The Victorian roof can also work really well when you might not have as much space in the garden as you would like. The internal plaster finish on the roof can look really attractive with its facet front finish.









#### Gable ended

The gable ended main feature is its continuous height it brings to the room owing to its long ridge down the centre. The gable also allows you to get the most from your roof windows giving you a light and airy space. Suitable for replacement or new build.







#### Combination

Increase your options with a combination Guardian Sunroom. A P-Shape simply combines the benefits of two different styles to maximise your living environment. The combination can also come in what you call a T-shape.

As individual as you are.





## What you need to know

The Guardian Warm Roof Conversion System has been designed to provide a high performance thermal and structural solution with zero condensation risk over the life of the roof.

Each of these elements has been fully tested and approved by independent industry experts to evaluate thermal performance, structural performance, condensation risk and quantify energy savings.

The Guardian roof best practice approach has enabled the Local Authority Building Control (LABC) to certify the Guardian Roof System as a LABC Registered System.

In some cases the Guardian roof conversion would be exempt if it was at ground level, does not exceed 30m<sup>2</sup> floor area, be thermally separated from the building it is attached to, have an independent heating system from the main building and have glazing that meets Part N in the critical zones.

However, Building Control approval should always be sought. But, with Guardian systems being LABC certified, this process should proceed without complication.

The Guardian Warm Roof Conversion System has been fully approved by LABC for use as a full replacement conservatory roof.

With Building Control approval, Guardian high performance insulated roof conversions may allow the removal of the wall between the house and the conservatory, offering the flexibility to extend and enlarge an existing kitchen, living room or bedroom.


Please consult your installer for more details.

#### LABC approval

this is t	o certify	/ that	
Celupla	st (NI) L	_td	
is registore	LABC REGIS		
Guard	RD Beferenzee Number	RD320 Celugiksti.deGuardian Roof	
valid until 7th August 2013	Draw ing Numliorus	2010-374 does1.14G (Calculate Edwardsin Roof space calculations)     2010-374 does1.17 (Colgitant refers space calculation)     2010-374 does1.17 (Colgitant refers space calculation)     2010-374 does1.12 (Colgitant ridge Space calculations)     2010-374 does1.12 (Colgitant ridge Space calculations)     CCR0003-1 Thermal analysis of Guardian Roof	
Ret. Folson	Supportingg Documentiation Reference Numbers	Approved Document 4' Approved Document 3' Approved Document 1' (Relevant Cakulations relating to Approved Document 1')	
Paul Everall GL LABC Chief Executive	Limitatoions of use	Cataplast Ltd — Guardian Roof is a proprietary solid roof system to replace the existing translucent roof to a domestic conservatory. This roof system achieves the u-values specified in Table 2 of Approved Document LLB. This registration applies to the roof only. If the former "conservatory" is no longer an exempt building due to not having a transparent roof them the following guidance should be followed:	
7 August 2012 date		<ul> <li>Approved Document A: The existing structure will need to be assessed to ensure its adequiry for training and additional lauks and may include exploratory mempigation: the adequiry for training and additional lauks and may prove the exploratory mempigation. The Approved Document I: Them may be accommodation without the proversitional areas become execution as a result of no larger barrieg ensure, Approved Document II Values 1: to comply with the parkness of the proversitional structure and the provided the parkness to comply with the parkness of the parkness parkness advances to capit 1.6 Fe mid.</li> </ul>	
*With limitation		to comply with the pickness of M (or attrinution pillance should be congit i.e. for end - Approved Document 118 datas that the should be congit i.e. the end of the floor area. In order for this limitation not to apply there should be: 1. Bitcher Horn all approach between the devillag and there "Constructory". 2. Independent temperature and coljient Control to any Nasting system installed I the hermal approximation and or glassity to the herma" "Constructory" theory the hermal approximation of glassity to the herma" "Constructory" the hermal approximation of glassity to the herma" "Constructory" theorist the notices to be: the XXX of the floor area and the glassity to the data delivere a U-solite XXVIII" & (damateria) the ablassics (data delivere and the solitory that the solitory of the solitor	
	Advice Notes Climitic		
	ConditionLeffeta e.gwind speeds height akhovers kwei exposure,		
	etz: LABE 66 Smdh Tel 020 7 Emmil 100 LA Wold: New		ed
	- Repl Dete	Autoral Guardian Roof*	
	Adde	pergy: Celuplast (N) k.M natic: Waters Enga, Carendon Dock, Boflast, 811 38H	
		Institute         That analisation that a maintplexement and spinnes for during conservations year balances observations. This system nuclears work's limitations and this separately applies to the ordination of the system of the system	
	Date	80) August 2012 Signed on bahall of LABC PDS "Jurner". Assassed by Ritzmeham Metropolitism Borough Council where the UMIAC agreement	
	We	under the LANTAG agreement	

### The Guardian Service Package

Building work of any kind can be a daunting process. The G the roof conversion you want. We will manage your project seamless process from your original enquiry, through Plane

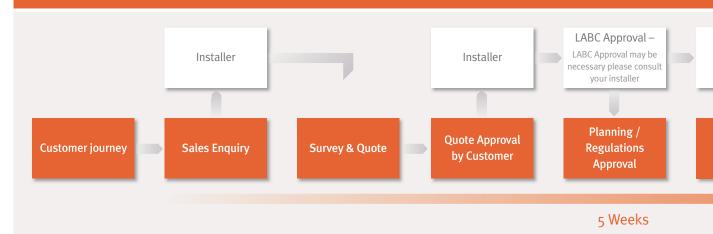

#### Aecom energy saving study

	Technica	il Note			AECON	
	Prepat	Investigating the Effects of I Conservatory Reeds	madated	ded. Nev	80370677	
	Dated	Reputte from #3 Dynamic T	termal Modelling			
	Preused by.	Elizabelk Ward		Dele	25" June 2012	
	Ormated by	Ewah Jones		Dete	26 <sup>th</sup> June 2913	
	Assessed by	Ewas Jones		Date	28" June 2212	
	of twinelds, The	of malidian systems to reduce held as include reduced heating requirem mint avails due to be places of tab	erns for both the part			
	rost compared	nderigien a dynamic thermal master with a barrapit constructely real. It name eating to monty requirement	te effect at the make	ten on a number o		
1.1	System: Thatmair Readening ACXM uses the CD Maturel Environment (primote Remoti looding without which is why excepted to be use of the testical building strategies and access AEXXM surgering water for AVXPC except as (in the end of its RES for and exception galaxy and Portfolds and Portfold access and the AVXPC except of the notice					
	Institut codella	where we up the period of the second se	regimes state the	ded undraw of th	ie roture.	
	Instant codell Deservic Period Instituty design and building laters a	ry package and therefore is will she al modeling in a provertial design test the sense of a wide range of resisten- wis, the process works by creating rapecter, building services such as increased and increases providers to the	and to contentiate their Basi to contentiate sense in contenting amongy on a conduct of the proper- menting and function of	ded analysis of fi I for a serge of loss as, thermal coordin red toolding testing reterms and build	in ration Advantages to colorise of Colding comparies process of generating in unspected of	
u	Renard could Descent Jacob Indulty design and building design building lates of heading lates of heading lates of heading and an	ry package and therefore is will she al modeling in a provertial design test the sense of a wide range of resisten- wis, the process works by creating rapecter, building services such as increased and increases providers to the	and to contentation thelp Bank to nonlinearly come in contenting termingly on a contenting terminal monthing and Rad May to backding the Date strends	ded analysis of fi I for a serge of loss as, thermal coordin red toolding testing reterms and build	in ration Advantages to colorise of Colding comparies process of generating in unspected of	
u.	Renard could Descent Jacob Indulty design and building design building lates of heading lates of heading lates of heading and an	ng penhaga and francisco is and pla al modelling is a propertied design ten in terms of a water range of resident time process water for constitut properties, loading versions such as a services and programs patience. The including	and to contentation thelp Bank to nonlinearly come in contenting termingly on a contenting terminal monthing and Rad May to backding the Date strends	ded analysis of fi I for a serge of loss as, thermal coordin red toolding testing reterms and build	in ration Advantages to colorise of Colding comparies process of generating in unspected of	
u	Receipt of the second s	ng penhaga and francisco is and pla al modelling is a propertied design ten in terms of a water range of resident time process water for constitut properties, loading versions such as a services and programs patience. The including	and the conductation date that the conductation date that the conductation date and the conductation date and the second of the theory of the second date and the following the date and the following the second date and the following the following the following the second date and the following the following the following the second date and the following the following the following the second date and the following the following the following the second date and the following the following the following the second date and the following the following the following the second date and the following the following the following the second date and the following the following the following the second date and the following the following the following the following the second date and the following the following the following the following the second date and the following	ded analysis of fi I for a serge of loss as, thermal coordin red toolding testing reterms and build	in ration Advantages to colorise of Colding comparies process of generating in unspected of	
u.	Receit could Design output with weather of the second backet with the second backet with the second backet with the second backet weather backet weather bac	ng undergo and franchise is welly in a factor by a set of the set	and to contraction and of methods and an accession of methods and an accession of methods and a factor pro- method and the factor pro- location of the factor pro- perties of the factor pro- teory of the factor pro- perties of the factor pro- teory of the factor pro-	And paralyses of Er I for a server of too a to home of could be to home of could be about a server of the server server of the server of the server server of the server of the server of the server server of the server o	in rubus Mary loose to colonize (of Variality growpend) regional of growning rig usage in terms of reside to der network in state to der network	

AECOM modelled a typical house with a standard "Victorian 12' x 12'" conservatory.

The conservatory was northward projecting with an electric heating system. A future energy price forecasts was accounted for under the "Green Stimulus" price forecast that yielded a saving of £5,447 after 25 years.

The key conclusion drawn from this evaluation is that the greatest benefits from installing the "Guardian" roof are made when it is retrofitted, as a result of the greater difference between the U-values of the original roof and the new roof type.

Any of the above reports are available on request from Guardian Warm Roofs, please email: info@guardianroof.co.uk

iuardian Service Package is the hassle-free way to achieve and keep you informed at every stage, providing a ning Permission to final installation and Certification.




#### Structural analysis



#### Kingspan thermal analysis



## Kingspan Insulation condensation risk analysis







## Transform your living environment in twelve simple steps





Fix box gutter to existing wall

roof ring beam.



Fix ringbeam to existing windows






Install external insulation




Edwardian conservatory

Fix rafters to ringbeam




Victorian conservatory option






Install roof window frame



Install roof window



Fix rafter cap and ridge



Install insulation between batten




Fit gutter



Plaster ceiling





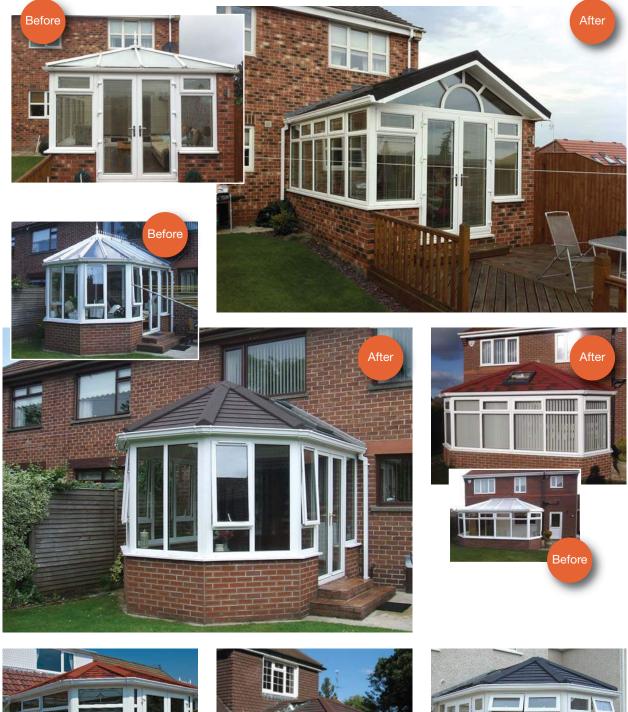













Guardian Roofs (Celuplast Ltd.) FREE Phone : 0800 0665832 Email: info@guardianroof.co.uk